



**KARTA
2260**



UCHWYT PRZELOTOWY WAHLIWY CIĘGŁOWY

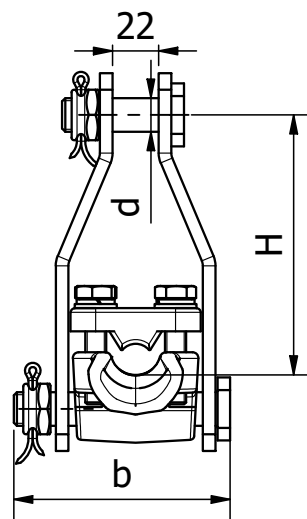

Rys. nr 1

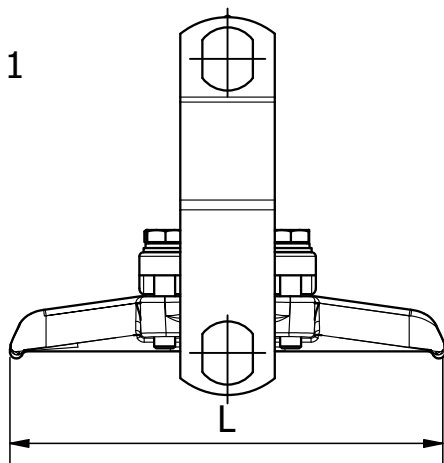

Rys. nr 2

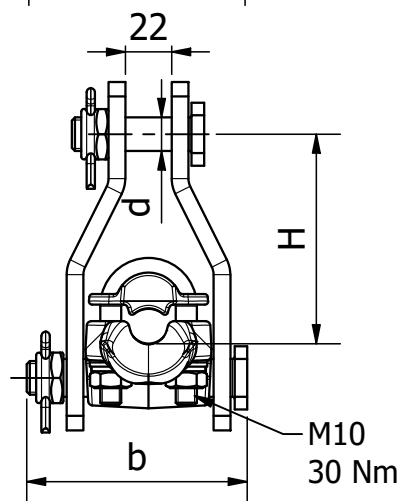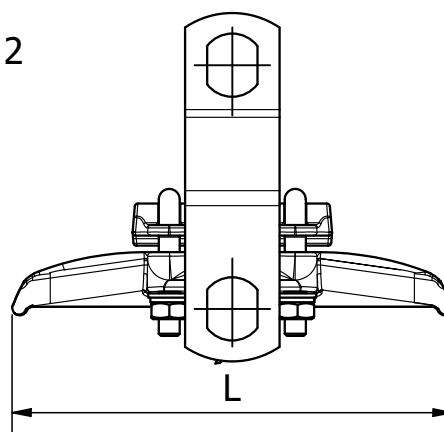

Nr rys.	Wyróżnik oznaczenia		Zamienny z	Wymiary [mm]				Zastosowanie do przewodu [mm]	Obciążenie niszczące [kN]	Masa [kg]
	ZEMEX	HANDLOWY		L	H	b	d			
1	2260-11/16	216961	---	180	110	112	16	11-16	100	2,05
1	2260-16/20	216971	---	260	135	114	20	16-20	120	3,05
1	2260-20/25	216981	---	350	165	129	20	20-25	120	4,41
2	2260-11/16-N	---	216961	210	100	105	16	11-16	120	1,95
2	2260-16/22-N	---	216971	210	100	105	19	16-22	120	1,97
			21597							
			21598							
			SN21598							

Materiał: Łódka i nakładka - stop aluminium
Kabłąk i części złączne - stal cynkowana ogniowo

Zastosowanie: Do zawieszenia przelotowego
przewodów na izolatorach wiszących

PKWiU 27.33.1

WPPUH "ZEMEX" Sp. z o. o. 63-100 ŚREM, ul. Podwale 1, tel. 612830693