



KARTA 2263



UCHWYT PRZELOTOWY WAHLIWIY KABŁĄKOWY

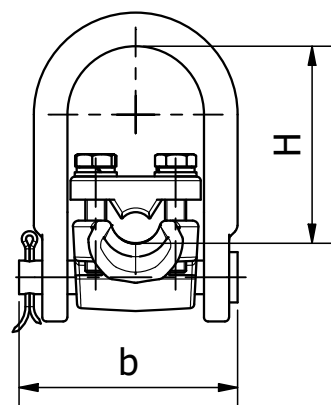

Rys. nr 1

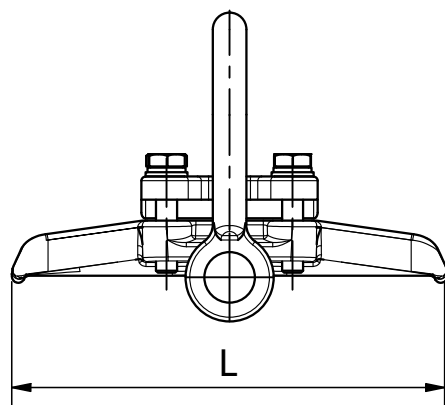

Rys. nr 2

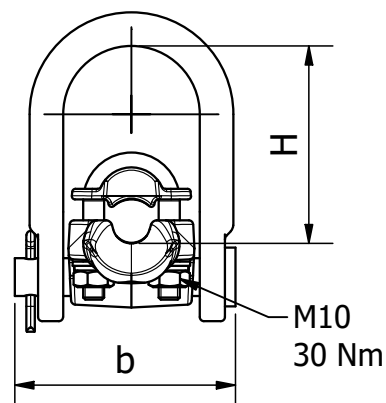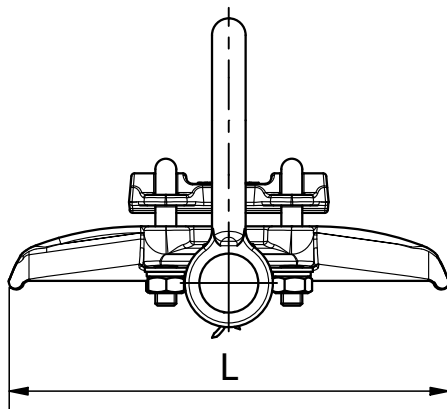

Nr rys.	Wyróżnik oznaczenia		Zamienny z	Wymiary [mm]			Zastosowanie do przewodu [mm]	Obciążenie niszczące [kN]	Masa [kg]
	ZEMEX	HANDLOWY		L	H	b			
1	2263-11/16	21696	---	180	80	105	11-16	100	1,47
1	2263-16/20	21697	---	260	76	120	16-20	120	1,98
1	2263-20/25	21698	---	350	108	135	20-25	120	3,12
2	2263-11/16-N	---	21696	210	94	105	11-16	120	1,47
2	2263-14/18-N	5160	---	210	94	105	14-18	120	1,47
2	2263-16/22-N	---	21697	210	94	105	16-22	120	1,50

Materiał: Łódka i nakładka - stop aluminium
Kabłak i części złączne - stal cynkowana ogniowo

Zastosowanie: Do zawieszenia przelotowego
przewodów na izolatorach wiszących

PKWiU 27.33.1

WPPUH "ZEMEX" Sp. z o. o. 63-100 ŚREM, ul. Podwale 1, tel. 612830693