


**KARTA
2485**

TRZON HAKOWY

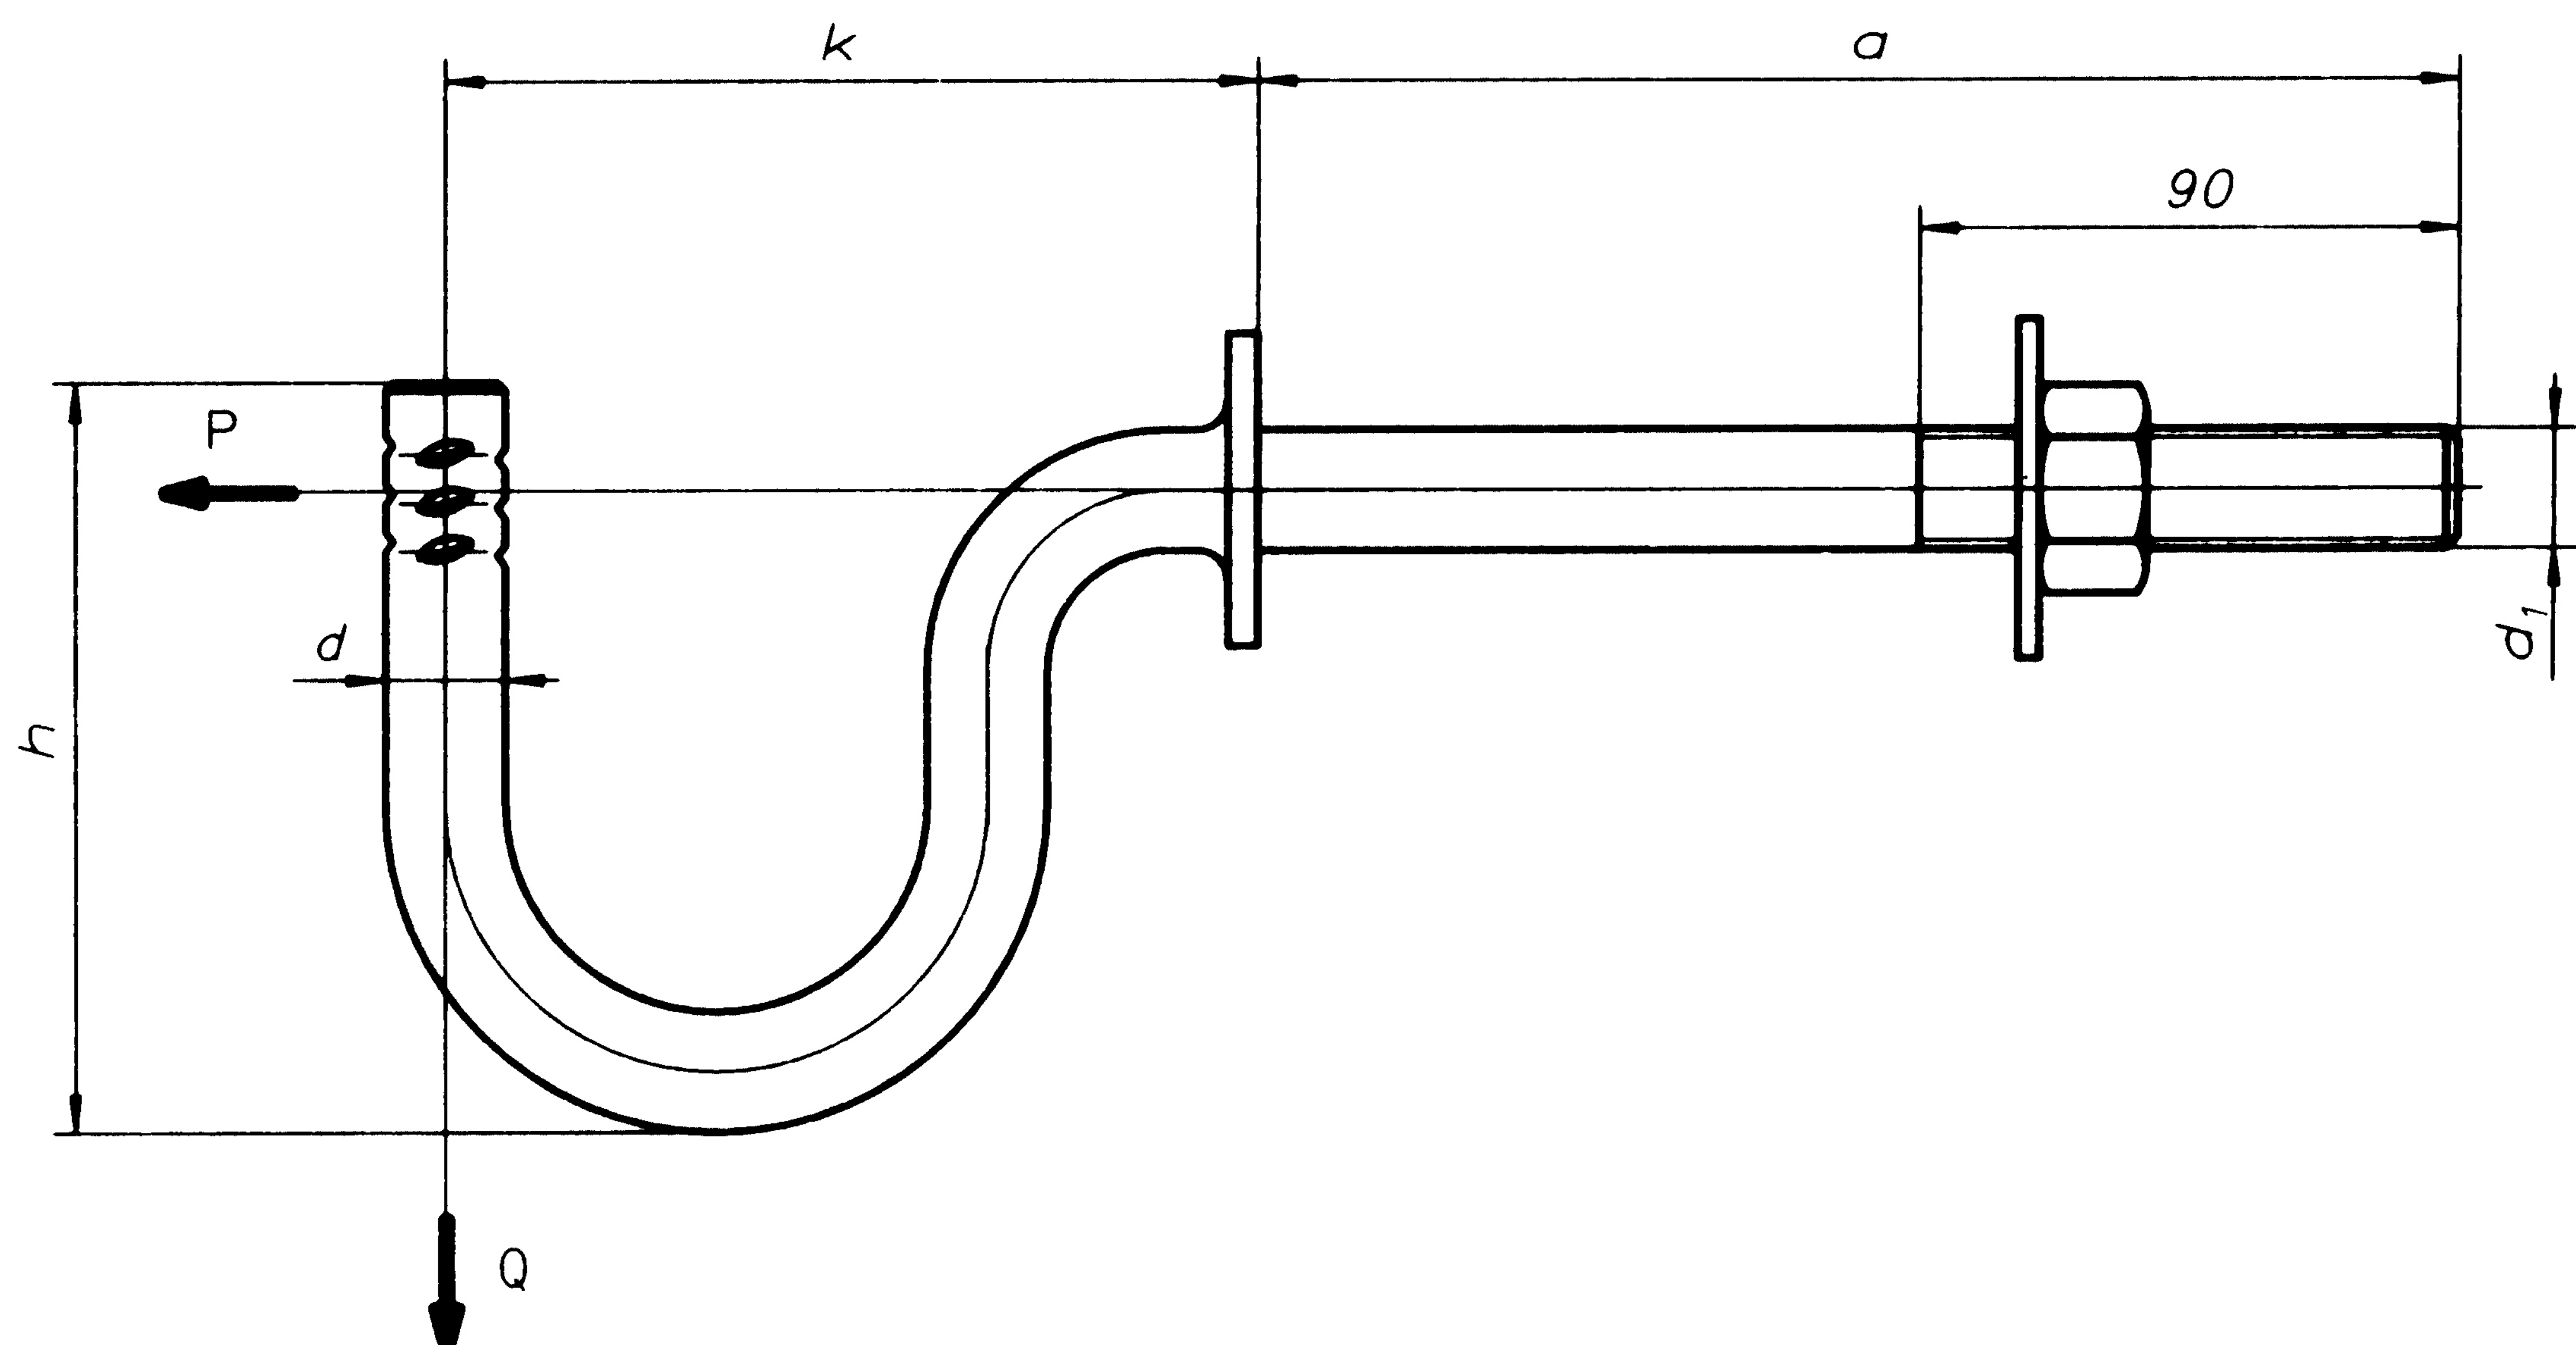

Wyróżnik oznaczenia		Wymiary [mm]					Zastosowanie do izolatorów	Dopuszczalne Obciążenie [kN]	
ZEMEX	HANDLOWY	a	h	d	d ₁	k		P	Q
2485-200/16	31910A	200	115	16	M16	125	N 80	6,8	5,5
2485-250/16	31911A	250	115	16	M16	125	N 80		
2485-300/16	31912A	300	115	16	M16	125	N 80		
2485-350/16	31913A	350	115	16	M16	125	N 80		
2485-400/16	31914A	400	115	16	M16	125	N 80		
2485-450/16	31915A	450	115	16	M16	125	N 80		
2485-200/20	31950A	200	125	20	M20	135	N 95	11	8,3
2485-250/20	31951A	250	125	20	M20	135	N 95		
2485-300/20	31952A	300	125	20	M20	135	N 95		
2485-350/20	31953A	350	125	20	M20	135	N 95		
2485-400/20	31954A	400	125	20	M20	135	N 95		
2485-450/20	31955A	450	125	20	M20	135	N 95		

Materiał: stal cynkowana ogniowo

Zastosowanie: Do mocowania izolatora na słupie w linii niskiego napięcia.

PKWiU 31.20.40-90.40

WPPUH „ZEMEX” Sp. Z o.o., 63-100 ŚREM, ul. Podwale 1 , tel. 612830693